844 LED Panel HE - UGR<lt/>19 - DIP SWITCH 4000K CRI 80 40W CLD White

Disano Illuminazione

Recessed modulars

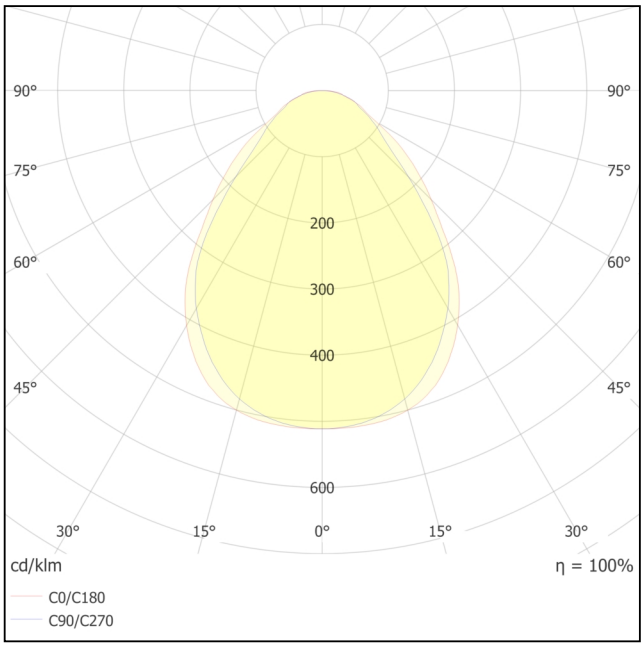

150225-00
Recessed in ceiling
Dimensions: 596x596x12 mm

Housing: body in steel sheet and frame in aluminium. Diffuser: in high transmittance prismatic technopolymer. Internal PMMA slab. : UGR<lt/>19, according to standard EN 12464. Low flicker: luminaire with very low flicker: evenly distributed light for greater visual safety. Photobiological risk: exempt risk group according to EN62471. : EN60598-1. They have a degree of protection according to the EN60529 standard. Equipment: Ceiling lighting fixture with external driver; it can be easily housed in false ceilings. Mounting: surface mounting on T-beams. Easy installation: quick connection without the need to open the luminaire, can be easily inserted into the ceiling. On request: - CLD-EC wiring for centrally powered emergency lighting (subcode -0050) - CLD-D (PUSH) (subcode -0045)

IP43

IK06

Equipment

1x led_844
40W
4996lm
4000K

Disano illuminazione S.p.A.
20089 Rozzano (Mi)
v.le Lombardia, 129

+39 02824771

info@disano.it
https://www.disano.it/en/

Technical and design specifications subject to change without notice.

Created by
DIALux catalogue