


# 1570 Clima - LED 3000K CRI 70 11W

## CLD

Disano Illuminazione



### Amenities

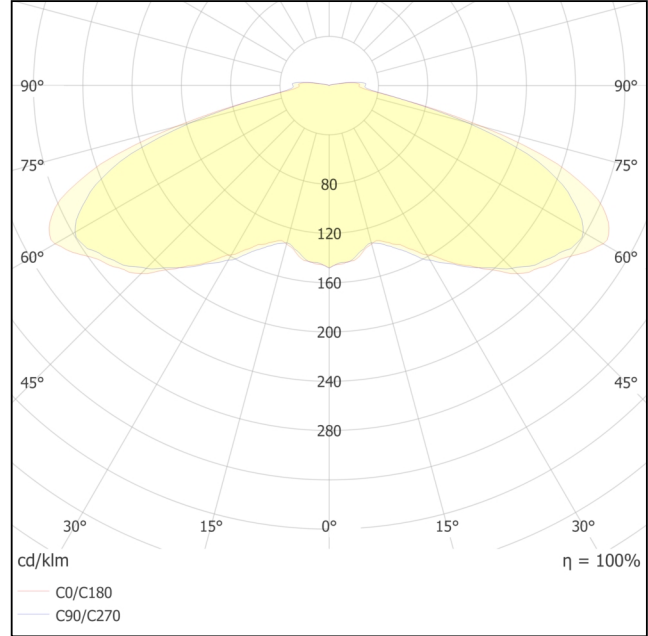

422403-39

Pole-Top

Dimensions: 514x514x427 mm

Housing: in die-cast aluminium, top cover in aluminium. Attachment: suited for poles with a diameter of 60 mm. Diffuser: in anti-glare polycarbonate, shatterproof and V2 self-extinguishing, UV stabilised, externally smooth and dustproof. Coating: the fully automated powder-coating cycle involves a polyester-based, salt-spray corrosion-resistant and UV-stabilised paint. Special coating: Upon request: protective coating recommended for marine environments within 5 km (3 miles) of the sea. Heat Sink: built-in. Low flicker: luminaire with very low flicker: evenly distributed light for greater visual safety. Photobiological risk: exempt risk group according to EN62471. : EN60598-1. They have a degree of protection according to the EN60529 standard. Equipment: - waterproof connector for quick installation with no need to open the fixture. - anti-condensation valve. - temperature controller with auto-reset. - EN 61547 compliant surge protection. - CLD PROG built-in functions. Mounting: on 60 mm diameter pole or bracket.

IP65

IK08

### Equipment

**1x Led\_1570\_14\_3k**  
11W  
1701lm  
3000K

Disano illuminazione S.p.A.  
20089 Rozzano (Mi)  
v.le Lombardia, 129

+39 02824771

info@disano.it  
<https://www.disano.it/en/>

Technical and design specifications subject to change without notice.

Created by  
DIALux catalogue