


1282 Meridiana LED 4000K CRI 80

9W CLD

Disano Illuminazione

Residential

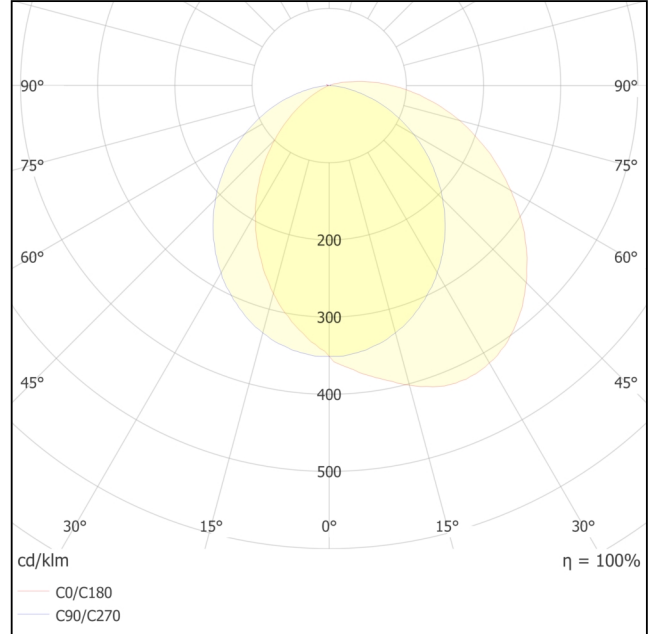

423095-00

Surface-mounted on wall

Dimensions: 409x340x341 mm

Housing: in die-cast aluminium. Optics: in high-performance prismatic and polished aluminium. Diffuser: tempered glass, 4 mm thick, resistant to thermal shock and impact (UNI EN 12150-1:2001). Coating: the fully automated powder-coating cycle involves a polyester-based, salt-spray corrosion-resistant and UV-stabilised paint. Photobiological risk: exempt risk group according to EN62471. : EN60598-1. They have a degree of protection according to the EN60529 standard. Equipment: - during installation the frame stays attached via a safety hinge mechanism that prevents it from dropping down accidentally. - with wall mounting plate. - gasket in eco-friendly material. Mounting: can be installed on pole with acc. 96 Easy installation: equipped for wall mount.

IP65

IK07

Equipment

1x LCWJ-1282

9W

1119lm

4000K

Disano illuminazione S.p.A.
20089 Rozzano (Mi)
v.le Lombardia, 129

+39 02824771

info@disano.it
<https://www.disano.it/en/>

Technical and design specifications subject to change without notice.

Created by
DIALux catalogue