

FRECUENCÍMETROS

Medida de la frecuencia de la red.


FRECUENCÍMETROS DE LÁMINAS

- Margen de Tensión: $\pm 15\%$ Vn
- Tensión (Vn): 100, 110, 230, 400, 440 V
- Precisión: 0,5 %
- Consumo propio: 1,2..2,2 VA
FC3VI, FC2VI:
2x (1,2..2,2 VA)



Modelo		FC5V	FC4V	FC3V	FC2V	FC3VI	FC2VI
Dimensiones	mm	48x48	72x72	96x96	144x144	96x96	144x144
Peso aprox.	kg.	0,23	0,39	0,47	0,88	0,84	1,50
FRECUENCÍMETROS DE LÁMINAS							
Láminas		7	13	13	17	21	2x17
Escalas	Hz	48,5..51,5 58,5..61,5	47..53 57..63	47..53 57..63	46..54 56..64	45..55 55..65	46..64 45..65

Dimensiones (mm)

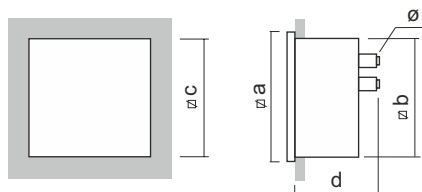

Modelos	Rango	Øa	Øb	Øc	d	ø
FC5V	100÷440	48	44,5	45 ^{+0,6}	59	M.4
FC4V	100÷440	72	66,5	68 ^{+0,7}	75	M.4
FC3V	100÷440	96	89	92 ^{+0,8}	74	M.4
FC2V	100÷440	144	135	138 ⁺¹	88	M.4
FC3VI	100÷440	96	89	92 ^{+0,8}	124	M.4
FC2VI	100÷440	144	135	138 ⁺¹	88	M.4

Esquemas de conexión

